

## EZ-SLIDER BEAM ANCHOR (5,000 lbf / 22kN)


A removable and reusable sliding I-beam anchor, easy to place and remove. This anchor is designed to easily glide along the beam while trailing the worker. Available in two sizes that are adjustable 3"-14" and a 12"-30" with a minimum flange thickness of .25"

### ACCEPTABLE INSTALLATION ORIENTATIONS

Adjustable Width: 4"-14"



Adjustable Width: 12"-30"

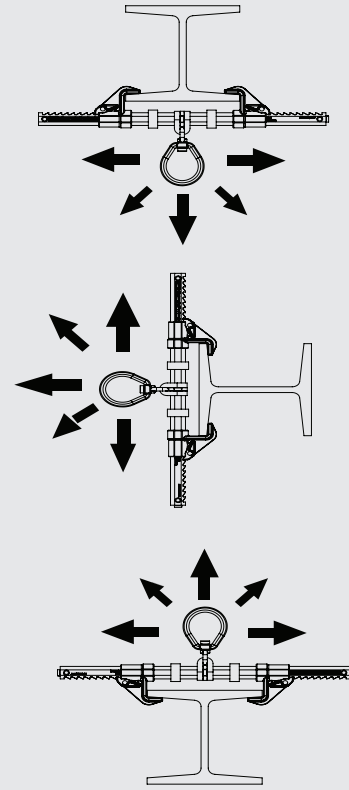

### PRODUCT CONFIGURATIONS

MODEL	APPLICATION	COLOR	LOADING	WEIGHT
BWA014B	I & H Beams	Bronze	5,000-lbf (22kN)	1578g
BWA030B	I & H Beams	Bronze	5,000-lbf (22kN)	3282g

### MATERIALS

- ▼ Swivel  
Zinc Plated Steel
- ▼ Swivel Mount  
Stainless Steel
- ▼ Support Bar  
Aluminum
- ▼ Clamps  
Bronze
- ▼ Rollers  
Nylon

### SPECIFICATIONS

- ▼ UTS  
5,000-lbf / 22kN
- ▼ Max User Weight  
310-lbs / 140kg
- ▼ Working Load  
1,000-lbs / 454kg